

Silage protection



m	6	7	8	9	10	12	14	18	20	25
5	64	48	48	36	36	32	28			
6			36							
10			24	20		16			10	10
15					14	12		8		
16							8			

italics = number per pallet



m	2	3	4	5	6
50	33	33	23	23	23
100	23	23			
300		8	2	2	2

italics = number per pallet



length (cm)	for wall thickness (cm)		
	7 - 15	13 - 22	20 - 30
70	x		
120	x	x	x

protec® Siloschutzgitter – silage protection net

- 220 g/m², green
- 7 years UV stable (North and Central Europe)
- contains handles for easy handling
- carefully seamed at the edges
- label of size sewn into all 4 corners
- protects against damage caused by external influences
- keeps the film from fluttering or „pumping up“
- improves protection of the silage's quality and the silo's visual appearance



protec® Seitenwandfolie – side wall sheets

- prevents oxygen and moisture from getting in between the wall and silage
- protects the wall from silage acids
- no dead-time – can be used at short notice, whatever the weather is like
- perfectly hygienic, easy to dispose of



protec® Wandfolienklammer – clip for side wall sheets

- clip for attaching side wall sheets to the silo wall
- high-quality stainless steel, gentle on the film, long service life
- one person can attach the sheets to the silo wall alone





cm	90	120
27	3400	4000

italics = number per pallet

***Please order in good time!**

Filling only after receipt of order

cm	90	120
27	50	50

italics = number per pallet



protec® Silosack – silage gravel bags

- tie cord is woven into the fabric
- integrated loops for easy handling
- sturdy selvedge
- solid, high quality monofilament fabric
- 7 years UV stable (North and Central Europe)
- colour stripes on one side extend the service life
Idea: odd year = stripes upwards
even year = stripes downwards
- fill with grit without sand, do not use stone chips
- bundles of 50



Now also available ready filled!*

- filled with fine grit up to approx. 2/3:
90 cm about 12 kg, 120 cm about 17 kg
(2/8 grain size)
- does not take up water
- remains supple, durable and flexible
- does not freeze into a block even when wet, is not washed out by rain
- easier to stack during storage
- adheres better to the silo surface for a seamless barrier
- optimum weight, easy handling even with 2 silage bags



protec® Barrierschlauch – barrier tube

- extremely durable woven belt (silage gravel bags not included)
- 50 m per roll
- openings every 2 metres, for all common types of silage gravel bags
- guaranteed UV-resistance: 7 years



protec® Safeline

- belt system for a fast and easy installation of oxygen barriers
- easy handling
- suitable for all silage gravel bags with handles
- 100 m belt, incl. 100 cable ties
- no risk of damaging the film
- for a better sealing and secure oxygen barriers
- stainless steel plates can easily be ordered separately (pack of 25)



protec® Tape Ultra

- for the simple bonding or repair of tears and holes in stretch and silage films
- excellent water vapour barrier
- colour: transparent
- 8 cm x 10 m roll, approx. 280 µ thick
- suitable for various smooth to rough substrates such as films, fleeces, glass, plastics or wood
- acrylic adhesive with very good water and ageing resistance, intensive adhesion, solvent-free
- good UV resistance 4 - 5 years
- highly flexible, with very good elasticity
- can be torn crosswise by hand
- also sticks to damp films and fleeces




protec® Folienklebeband – adhesive film tape

- for repairing damages to silage bales or silage film
- available in white, light green and black



protec® Silolack – silo varnish

- contains high vacuum bitumen (HVB)
- ring and ball softening point: 100 °C
- the solvent is purified and phenol-free
- no contamination of the forage with coating residues (as it will not stick to the varnish)
- provides a non-sticky surface
- resistant to forage acids
- food-safe, therefore suitable for drinking water reservoirs
- consumption: approx. 1 litre per 5 m² for two coatings
- available as 200 litre barrel or 30 litre bucket

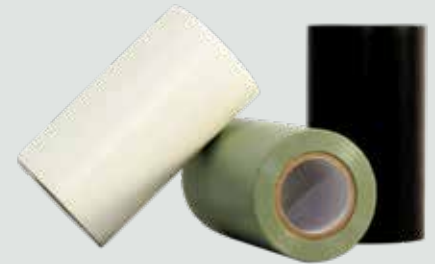


protec® Abroller – film unwinder

- for easy handling of film rolls
- when you purchase a large roll (150 metres or longer) we will provide you with a loaner:
 - single unwinder or double unwinder up to 28 m wide




Our tip:

If the roll is too narrow, cut two old film cores to a suitable size and pull them over the metal tubes on the right and left. This will reduce the „slipping“ of the roll and promote the film to unroll more smoothly.



OXY Protec®

- extra strong premium fleece (300 g/m²)
- the all-rounder in terms of covering and protection
- for flat silos, straw and wrapped bales, beets, grain, compost, manure, etc.
- extra thick material
- better protection against damage due to heat treatment on both sides
- handy size
- variable system, can be adapted to any silo size
- gentle to the film
- at least 5 years UV-stable

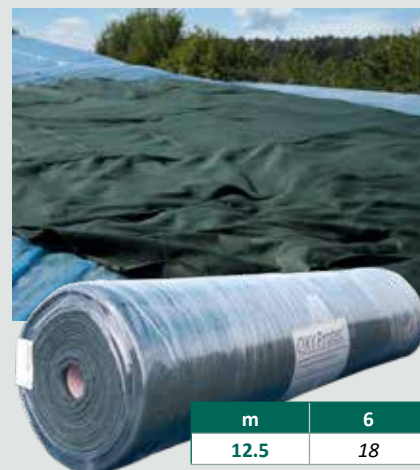

m	6
12.5	18

italics = number per pallet

protec® Premium Vlies 160

- proven for years to protect straw bales and grain
- extra strong version (160 g/m²)
- safer under mechanical stress
- particularly tear and tensile strength
- made of high-strength PP staple fibers, without adhesives and chemical binders
- UV-stable for at least 5 years
- protection against environmental and weather influences and soiling such as bird droppings
- very cosy material
- the air permeability and weight of the fleece reduce the classic 'sail effect'
- easy handling




m	9.8
12.5	18
25.0	8

italics = number per pallet

protec® Vlies 130

- protective fleece (130 g/m²) for straw bales, potatoes, sugar beets, compost
- protection against environmental and weather influences and soiling such as bird droppings
- water-repellent and breathable at the same time
- high stability under mechanical strain
- withstands high wind loads
- UV-stable for at least 5 years
- fleece individually packed in a transparent bag, with installation instructions
- fleece clips: 1 bag = 20 pieces

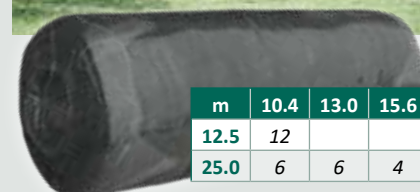

m	10.4	13.0	15.6
12.5	12		
25.0	6	6	4

italics = number per pallet

joachim behrens scheessel gmbh

Milchstraße 1 ▪ D-27374 Visselhövede

Tel.: +49 4262 - 2074 913 ▪ int@jbs-agrar.com ▪ jbs-agrar.com

